

Be sure to read and understand all instruction sheets completely before beginning assembly or installation.

- All assembly and installation work must be performed by qualified personnel, in accordance with all applicable national and local building and electrical codes.
- Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware at your site. In all cases, it is the responsibility of the contractor to properly secure the fixture to the structure, and to provide adequate support for the fixture.
- Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter installed appearance or reduce function or performance.

ITEM#: CL11025

1) Turn the power off! Pull the wires out of the junction box and feed them through the center hole in the mounting plate. Attach the mounting plate to the junction box with the screws provided. Two extra screws are provided to mount the outsides of the mounting plate to the ceiling. The outside screws should be anchored to structure.


2) Choose the preferred length of nipple and tubing for the drop you need (3 different sizes provided). Feed the light fixture wires through one of the nipple and tubing and thread both nipples into the light fixture. Slide the tubing over the nipples and feed the light fixture wires through the decorative cover and bolt the decorative cover onto the nipples with the washers and wing nuts provided. Fasten securely.

3) Screw the lamps (provided by others) into the sockets.

4) Connect the light fixture wires to the wires in the junction box. Wire black or brown to line voltage, white or blue to neutral, and attach the green or bare wire to the green ground screw provided on the mounting plate. Use wire nuts on the connections and leave no bare wire exposed (excepting the green). Tuck the wires inside the junction box.

5) Secure the light fixture to the mounting plate by lining up the holes on the sides of the mounting plate with the holes on the sides of the decorative cover. Make sure to fasten securely.

6) Turn the power back on and you have completed the installation process.

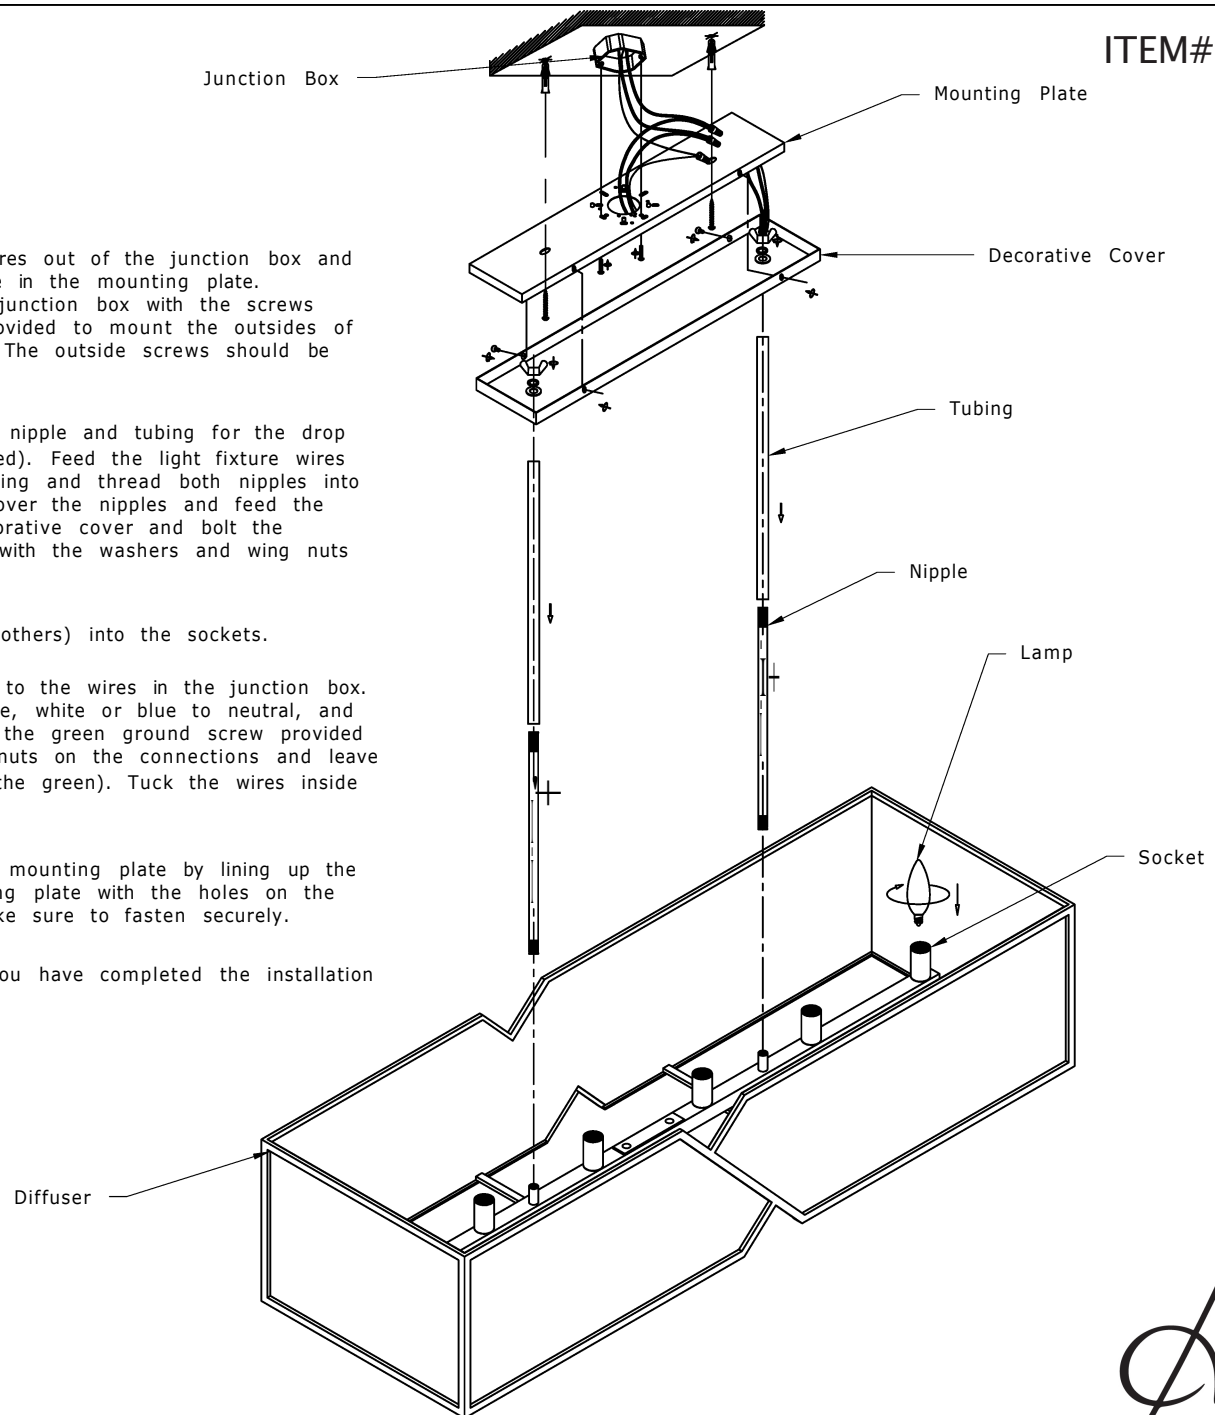

Atlas
LIGHTING & HOME
ARTISTRY THROUGH LIGHTING AND STYLE

atlaslightingandhome.com