


Be sure to read and understand all instruction sheets completely before beginning assembly or installation.

- All assembly and installation work must be performed by qualified personnel, in accordance with all applicable national and local building and electrical codes.
- Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware at your site. In all cases, it is the responsibility of the contractor to properly secure the fixture to the structure, and to provide adequate support for the fixture.
- Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter installed appearance or reduce function or performance.

ITEM#: CL11111

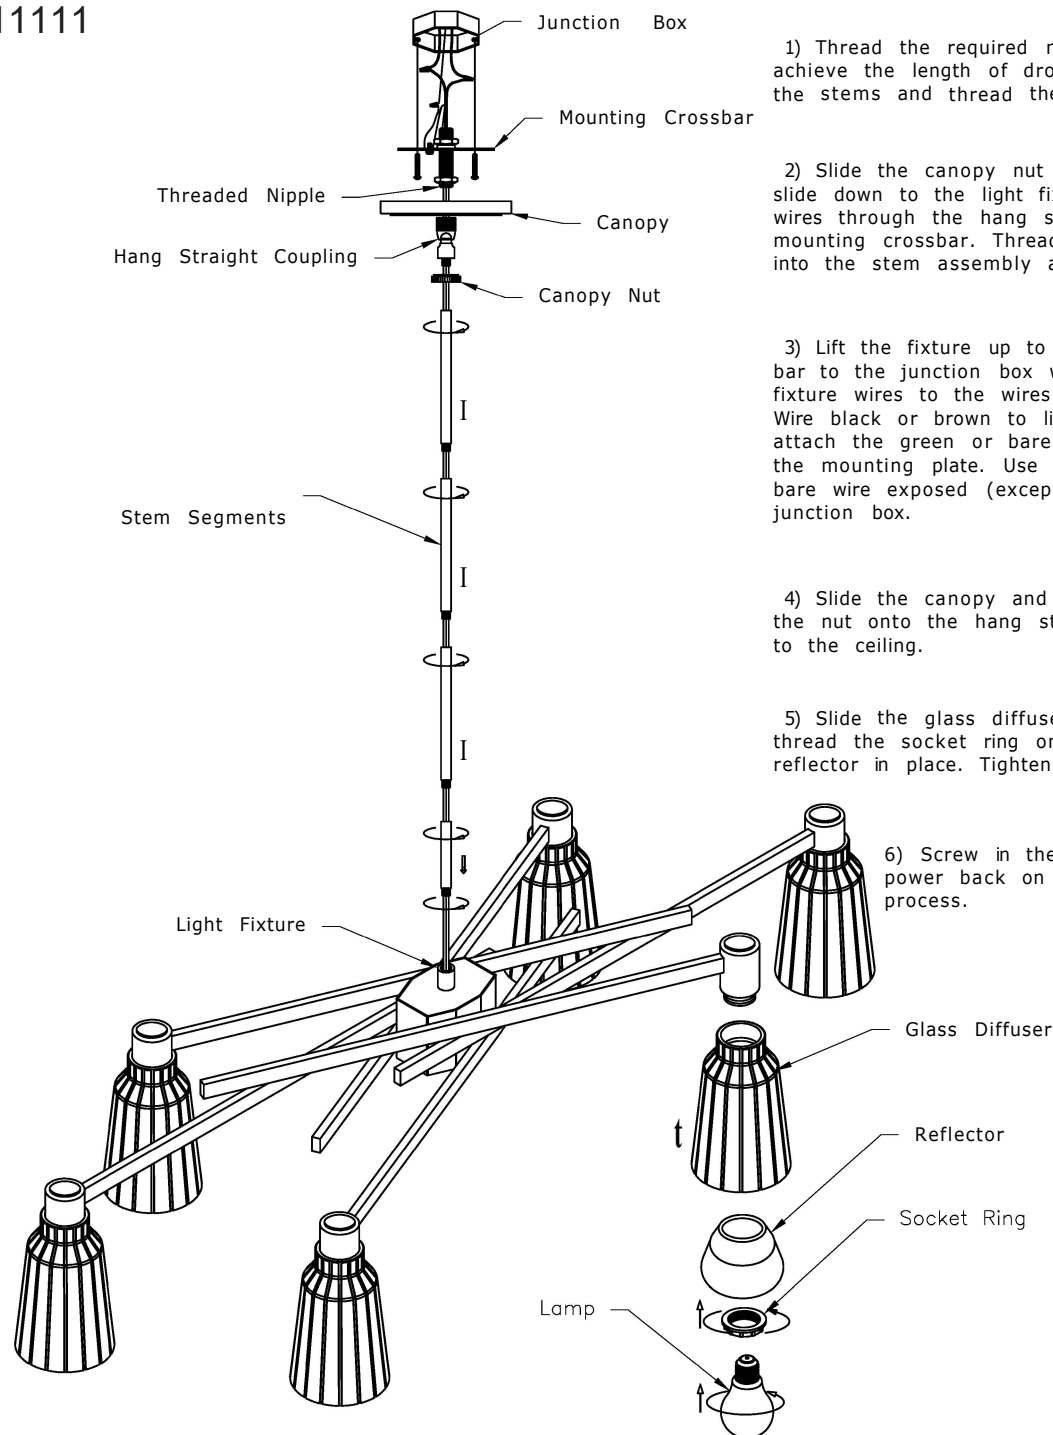

1) Thread the required number of stem segments together that will achieve the length of drop you need. Feed the fixture wire through the stems and thread the stem assembly into the light fixture.

2) Slide the canopy nut and canopy over the stems and let them slide down to the light fixture for the time being. Feed the fixture wires through the hang straight coupling and the nipple on the mounting crossbar. Thread the hang straight coupling and the nipple into the stem assembly and tighten accordingly.

3) Lift the fixture up to the junction box and screw the mounting bar to the junction box with the screws provided. Connect the light fixture wires to the wires in the junction box. Wire black or brown to line voltage, white or blue to neutral, and attach the green or bare wire to the green ground screw provided on the mounting plate. Use wire nuts on the connections and leave no bare wire exposed (excepting the green). Tuck the wires inside the junction box.

4) Slide the canopy and canopy nut up top the ceiling and thread the nut onto the hang straight coupling so it holds the canopy tight to the ceiling.

5) Slide the glass diffuser and the reflector over the socket and thread the socket ring onto the socket to hold the diffuser and reflector in place. Tighten firmly.

6) Screw in the lamp (provided by others). Turn the power back on and you have completed the installation process.

Atlas
LIGHTING & HOME
ARTISTRY THROUGH LIGHTING AND STYLE

atlaslightingandhome.com