



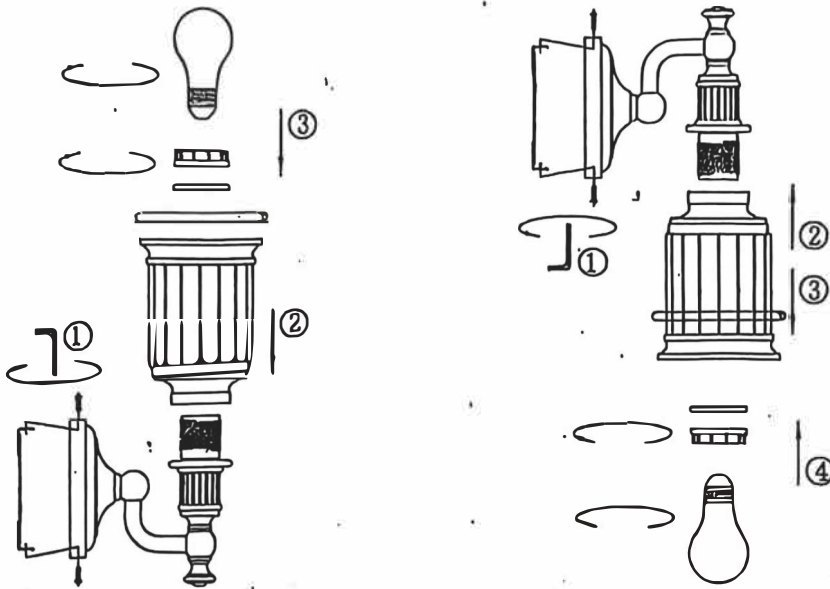

ITEM#:52000/1 52010/1 52001/2 52011/2 52002/3 52012/3 52003/4 52013/4

STANDRD MOUNTING PLATE INSTALLATION INSTRUCTIONS

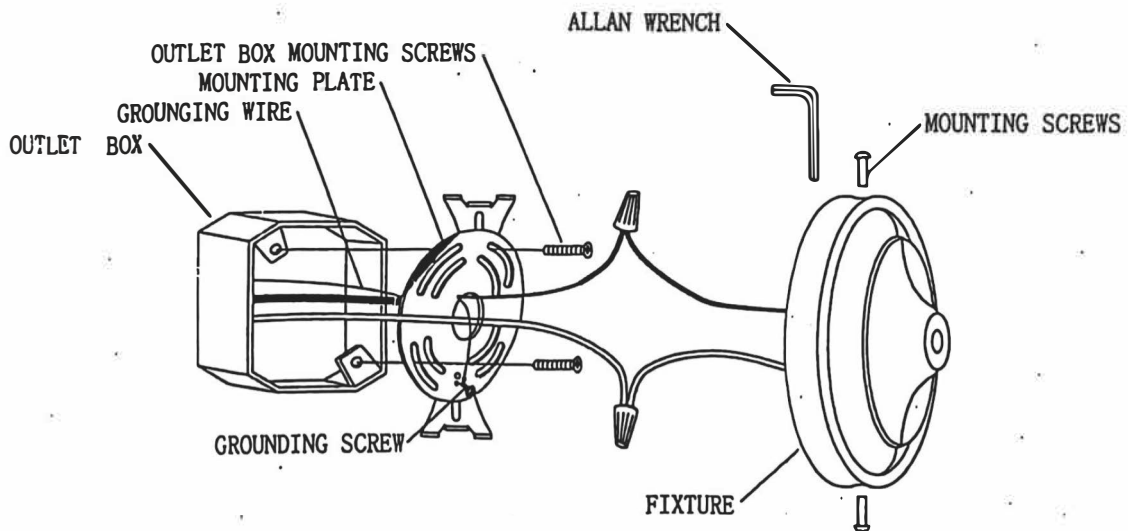

CAUTION:DISCONNECT POWER DURING INSTALLATION

1.)If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.

2.)Fasten the mounting plate to the outlet box using the two screws supplied with the outlet box.

3.)Spread the electrical wires so that the black wires are on one side of the outlet box and the white wires are on the other side.

4.)Grounding instructions:

A)On fixture where mounting plate is provided with a green ground screw and two raised dimples. Wrap ground wire from outlet box around green ground screw and tighten.

B.)On fixtures where mounting plate is provided with a green ground wire attached.Connect mounting plate ground wire to ground wire from outlet box with wire connector(not provided) If fixture is provided with ground wire.


Connect fixture ground wire to ground wire from outlet box with connector(not provided).After following the above steps.Never connect ground wire to black or white power supply wires.

5.)To make electrical connections:Connect the White wire(s)from the fixture to the white wire of the outlet box Connect the black wire(s)from the fixture to the black wire of the outlet box.NOTE:Black outlet box wire may be red,round & smooth and/or wire may be square & ridged and/or have a silver conductor. .

6.)Place fixture against mounting surface allowing the machine screws to pass through the fixture cover plate. Secure mounting screws with Allan wrench.


WIRING AND MOUNTING INSTRUCTIONS

1A

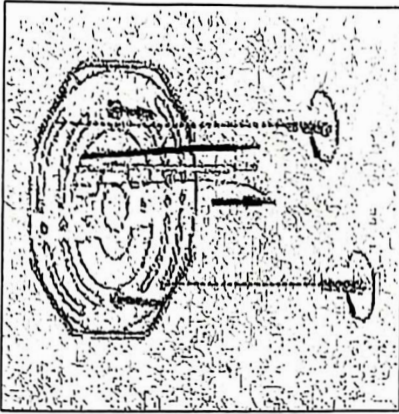


Carefully pull house wires through opening in center of mounting plate. With mounting plate threads facing outward, screw mounting plate into junction box using outlet box screws.

1B

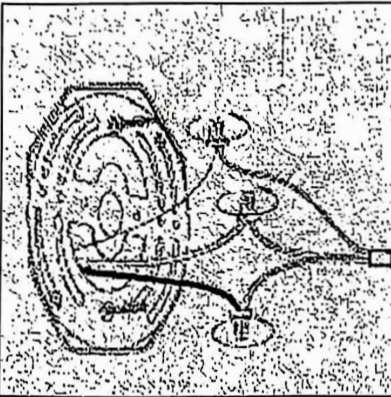


Strip $\frac{3}{4}$ " of insulation from wire ends. Connect house ground wire to fixture ground wire marked with symbol. Twist wires together using wire nut. Connect black house wire to the fixture wire marked "L". Twist wires together using wire nut. Connect white house wire to the fixture wire marked "N". Twist wires together using wire nut.

1C

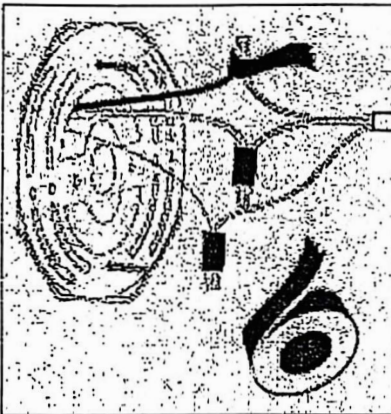

Tape wires and wire nuts together using electrical tape.

1D

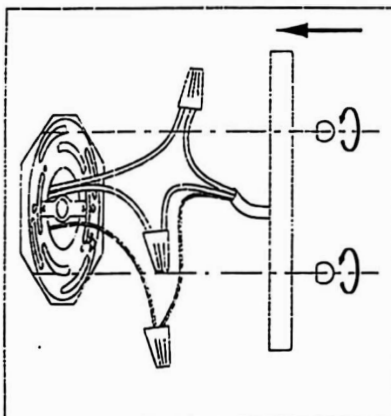

Line up threads on mounting plate with holes in fixture canopy, attach fixture to junction box using cap nuts. Be sure to carefully tuck wires into canopy while attaching.

(Continue with step 3 of installation on other side.)